INSTALLATION INSTRUCTIONS ALUMACRAFT FISHING ACCESSORIES

Thank you for purchasing our new and innovative Alumacraft
Fishing Accessories designed to be used with our Alumatrac[™]
Gunnel Bracket. Each of the accessory parts are easy to install
and will make your fishing and boating experience more enjoyable.
Please follow these instructions carefully. If you have any questions,
please contact your local Alumacraft dealer. Each accessory
requires one (1) Alumatrack gunnel bracket (purchased separately).

Tools Needed

Tape Measure Grease Pencil

#2 Phillips Screwdriver

Power Drill

1/4" Drill Bit

Small Adjustable Pliers or Wrench

Safety Glasses

INSTALLATION:

STEP 1 - INSTALLING HARDWARE ONTO THE ALUMATRAC BRACKET

Locate your Alumatrack Bracket and remove the face plates by turning and removing the thumb screw (Fig. 1). Mark two (2) drill holes on the face plate using the drill hole template below. Using the drill and 1/4" drill bit, drill each hole through the face plate and remove any burrs or plastic shavings. Locate the nubs, bolts and black buttons. Insert bolt through button and face plate and add the nut to the back side of the face plate and tighten securely. The completed bracket assembly is showing in Fig. 2.

INSTALLATION CONTINUED ON PAGE 2.





Fig. 1. Fig. 2.













STEP 2 - INSTALLING HARDWARE ONTO THE ALUMATRACK BRACKET

Select the place you wish to hang the accessory on the gunnel. Attach the bracket by hanging the face plate on the inboard side and reattach the back plate with the thumb screw and tighten securely as shown in Fig. 3.

STEP 3 - ATTACH THE ACCESSORY PART

Locate the key hole slots on the back side of the accessory part and align it with the buttons on the Alumatrack Bracket. Push the accessory over the buttons and pull down to lock the accessory onto the bracket. See Fig. 4. If you have the Cup Holder Accessory or the Fender Hanger Strap kit, you only use one button.


For Fender Hanger Strap Kit, attach keyhole bracket over one of the installed buttons and flip fender over the side of the boat (fender not included with strap kit) Fig.5







Fig. 3. Fig. 4. Fig. 5.

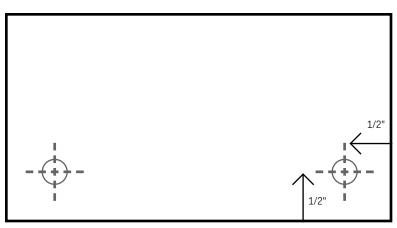

Drill Hole Template